


# A2EXP

## 495NE Series

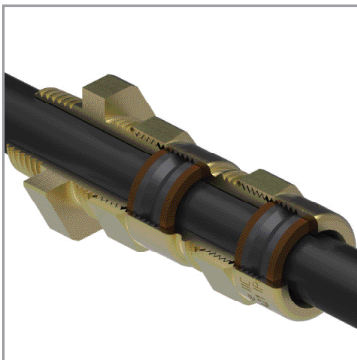

The A2EXP is a cable gland that provides high performance in high temperatures in deluge and IP68 conditions.

### Key Features

- Brass indoor and outdoor cable gland for use in hazardous areas
- Suitable for circular unarmored cables with extruded oversheath
- Fitted with silicone rubber low smoke, zero halogen seal
- Achieves IP66, IP68 (1 bar) and deluge proof (DTS01:1991) seal onto cable and to enclosure with suitable sealing washer or thread sealant.
- Suitable for most climatic conditions – weatherproof, waterproof and deluge proof
- Nickel plated and standard versions available
- Certified II 2GD, Ex e II & Ex d IIC under ATEX directive 94/9/EC.
- Certificate number Sira99ATEX1086X, IECEx 10.0069X
- Service temperature range -50°C to +200°C
- UL Classified in accordance with IEC 60079-0, 60079-1 and 60079-7 for use in hazardous locations
- UL Listed for use in Class I, Zone 0, 1 and 2 hazardous locations for Canada
- Full installation instructions supplied



### May be used in


- Zones 0, 1 & 2 with Ex ia IIA, B & C equipment
- Zones 1 & 2 with Ex ib IIA, B & C equipment
- Zones 1 & 2 with Ex e II equipment
- Zones 1 & 2 with Ex p II equipment
- Zone 2 with Ex nA II equipment
- Zones 21 & 22 with Ex tD II equipment

### Where the cable is effectively filled, may also be used in

- Zones 1 & 2 with Ex d IIC equipment not containing a source of ignition & with a volume less than 2000 cm<sup>3</sup>
- Zones 1 & 2 with Ex d IIA & Ex d IIB equipment not containing a source of ignition & with any volume
- Zone 1 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with a volume less than 2000 cm<sup>3</sup>
- Zone 2 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with any volume
- Zone 2 with Ex nR II equipment

## Specifications

Gland Reference		Cable Dimensions Accommodated Outer Seal Overall Ø (B)				Gland Dimensions				Weight
Design Reference		Hub Size NPT (D)	Basic Metric	Min	Max	Hub Length (E)	Protrusion Length (F)	Hexagon		lbs
Fully Plated	Un Plated							A/F (G)	A/C (H)	
495NE-03V	495NE-03	½"	20SS	0.138"	0.335"	0.60"	2.56"	0.85"	0.97"	0.265
495NE-04V	495NE-04	½"	20S	0.315"	0.453"	0.60"	2.44"	0.85"	0.97"	0.265
495NE-05V	495NE-05	½"	20	0.315"	0.630"	0.64"	3.19"	1.00"	1.13"	0.320
495NE-08V	495NE-08	¾"	20	0.315"	0.630"	0.64"	3.19"	1.00"	1.13"	0.320
495NE-10V	495NE-10	¾"	25	0.453"	0.827"	0.76"	3.37"	1.29"	1.45"	0.540
495NE-14V	495NE-14	1"	25	0.453"	0.827"	0.76"	3.37"	1.29"	1.45"	0.540
495NE-15V	495NE-15	1"	32	0.728"	1.063"	0.80"	2.72"	1.47"	1.65"	0.520
495NE-20V	495NE-20	1 ¼"	32	0.728"	1.063"	0.80"	2.72"	1.47"	1.65"	0.496
495NE-21V	495NE-21	1 ¼"	40	0.945"	1.339"	0.82"	3.23"	1.85"	2.11"	0.550
495NE-27V	495NE-27	1 ½"	40	0.945"	1.339"	0.82"	3.23"	2.21"	2.47"	0.959
495NE-32V	495NE-32	2"	50	1.220"	1.814"	0.86"	3.11"	2.21"	2.40"	1.334
495NE-38V	495NE-38	2 ½"	63	1.575"	2.067"	1.27"	4.47"	2.75"	3.02"	2.657
495NE-44V	495NE-44	3"	75S	2.067"	2.283"	1.31"	3.09"	3.13"	3.42"	2.965
495NE-45V	495NE-45	3"	75	2.146"	2.579"	1.31"	4.72"	3.13"	3.42"	2.778

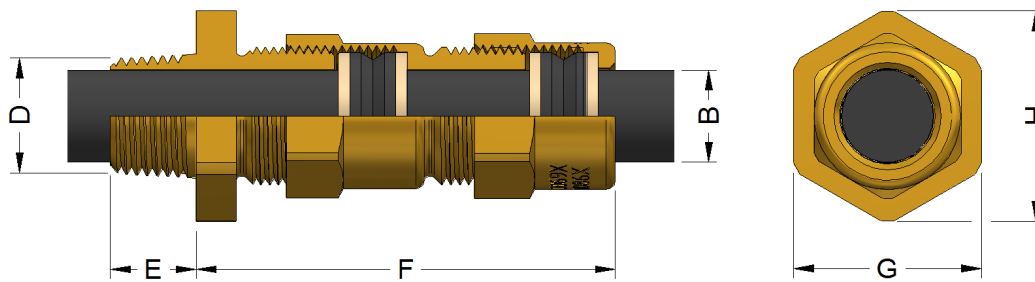

**Prysmian Cables & Systems Limited,**  
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

**Commercial Enquiries,**  
Sales Office Tel: 0845 767 8345,  
International Sales Office Tel: +44 2380 295481

[www.biconcomponents.co.uk](http://www.biconcomponents.co.uk)