

# Barr-A (Aluminum)

## 424UN Series



The Barr-A is an aluminum explosion proof gland suitable for tray cables which aids the control of migrating gases and is the best choice for when the highest level of hazard protection is required.

### Features and benefits:

- Fast, easy installation
- Large sealing range
- Space and weight saving
- Tested to UL and CSA standards
- UL Listed for Class 1, division 1 & 2 Applications
- Suitable for unarmoured tray cables - TC-ER-HL & TC-ER

**NEW**

NOW  
UL CLASS 1 DIV1  
For  
TC-ER-HL Cable



## Technical Information:

- Suitable for unarmored tray cables – category TC-ER-HL & TC-ER
- Aluminum construction with nickel plated brass inner components

### Connector listed as follows:

½" to 3 ½" CSA Class I groups ABCD, Class II Groups EFG, Class III


½ to 1 ½, UL Class I groups ABCD (Div 1) with TC-ER-HL cable (up to 1 inch); Class II Groups FG (Div 2), Class III

1" to 3 ½" UL Class I groups CD (Div 2); Class II Groups FG (Div 2), Class III

- Compound forms barrier around individual cores, so preventing migration of gases through the centre of the cable
- For use in most climatic conditions, rated to IP66 for wet locations
- For use with explosion proof equipment in Zone 1 and 2 hazardous areas and for Class I, Div 1 & 2 applications
- Equivalent European designs available: Approved to European & IECEx standards
- Full installation instructions supplied

## Specifications

Gland Reference		Cable Dimensions Overall Ø (B)			Gland Dimensions			Weight
Design Reference	Hub Size NPT (D)	Min	Max	Hub Length (E)	Protrusion Length (F)	Hexagon		lbs
						A/F (G)	A/C (H)	
424UN-02	½"	0.35"	0.62"	0.85"	1.85"	1.42"	1.57"	0.5
424UN-03	¾"	0.51"	0.76"	0.86"	1.96"	1.67"	1.89"	0.5
424UN-04	1"	0.67"	1.06"	1.07"	2.08"	1.86"	2.11"	0.75
424UN-05	1 ¼"	0.95"	1.26"	1.10"	2.16"	2.22"	2.42"	1.25
424UN-15	1 ½"	0.95"	1.26"	1.11"	2.16"	2.22"	2.42"	1.25
424UN-06	2"	1.14"	1.65"	1.15"	2.32"	2.76"	3.04"	1.75
424UN-07	2 ½"	1.61"	2.08"	1.70"	2.24"	3.15"	3.44"	2.25
424UN-08	3"	1.96"	2.42"	1.76"	2.83"	3.89"	4.30"	4.25
424UN-09	3 ½"	2.15"	2.91"	1.81"	2.91"	4.18"	4.50"	5.5

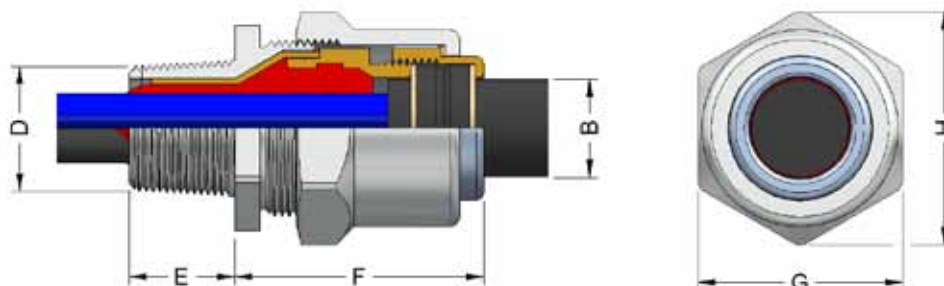

**Prysmian Cables & Systems Limited,**  
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

**Commercial Enquiries,**  
Sales Office Tel: 0845 767 8345,  
International Sales Office Tel: +44 2380 295481

[www.biconcomponents.co.uk](http://www.biconcomponents.co.uk)