


BWL Gland Kit

KJ417 Series

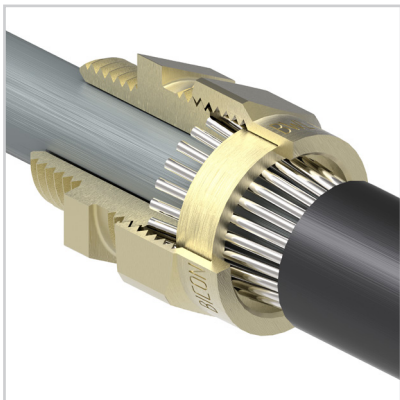

The BWL Gland kit is an industrial indoor cable gland for rapid termination of steel wire armoured cables.

Features and benefits:

- Indoor type for LSOH SWA cable
- Three Part Gland with separate locking ring
- Brass indoor gland and accessories
- For galvanized-steel single-wire armour, plastic or rubber sheathed cables
- For use in dry, dust free situations
- Provides mechanical cable retention and electrical continuity via armour locking mechanism

Kit comprises

BWL Gland
Brass Earth Tag
Brass Locknut
PVC Shroud
(2 per kit up to and including 25mm size)




Technical Information:

- Suitable for use with all Steel Wire Armoured Cables inc: BS 5467, BS 6622, BS 5308
- CuZn39Pb3 brass alloy used for guaranteed strength and performance
- Complies with BS 6121-1:2005
- Service temperature range -20°C to +90°C

Specifications

Gland Kit Reference			Cable Dimensions mm			Gland Dimensions mm				
Design Reference	Size	Qty per Kit	Under Armour \varnothing (A)		Armour Wire \varnothing	Entry Thread (D)	Thread Length (E)	Protrusion Length (F)	Hexagon	
			Max						A/F (G)	A/C (H)
KJ417-51	16	2	8.6		0.9	M16x1.5	10	30	23.4	26.7
KJ417-52	20s	2	11.6		0.9	M20x1.5	10	32	25.7	29.2
KJ417-53	20	2	13.9		0.9/1.25	M20x1.5	10	32	27.0	30.5
KJ417-55	25	2	19.9		1.25/1.6	M25x1.5	10	33	36.0	40.0
KJ417-56	32	1	26.2		1.6/2.0	M32x1.5	10	35	42.4	48.0
KJ417-57	40	1	32.1		1.6/2.0	M40x1.5	15	36	56.4	61.5
KJ417-58	50s	1	38.1		2.0/2.5	M50x1.5	15	40	65.0	71.4
KJ417-59	50	1	44.0		2.0/2.5	M50x1.5	15	41	70.0	77.2
KJ417-60	63s	1	50.0		2.5	M63x1.5	15	39	79.5	87.4
KJ417-61	63	1	55.9		2.5	M63x1.5	15	41	79.5	87.4
KJ417-62	75s	1	61.9		2.5	M75x1.5	15	47	89.7	99.1
KJ417-63	75	1	67.9		2.5	M75x1.5	15	47	98.6	109.5
KJ417-64	85	1	75.0		3.15	M85x2.0	20	55	115	126
KJ417-65	90	1	82.5		3.15	M90x2.0	20	60.5	115	126

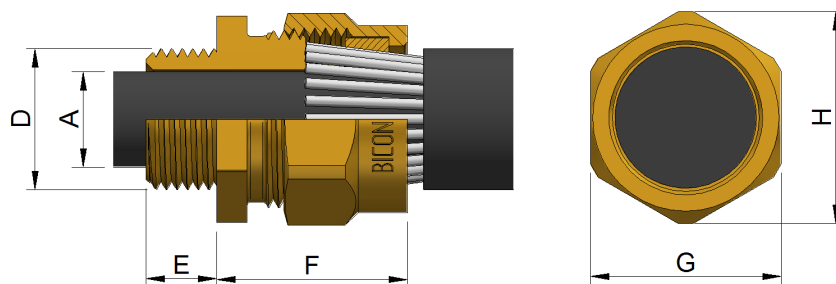

Prysmian Cables & Systems Limited,
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

Commercial Enquiries,
Sales Office Tel: 0845 767 8345,
International Sales Office Tel: +44 2380 295481

www.biconcomponents.co.uk