


## E1WF Ex d IIC / Ex e II 472AA Series

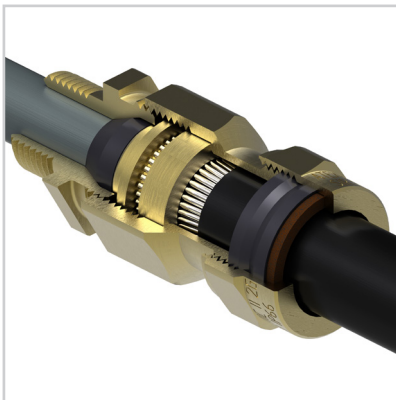

**The E1WF is a hazardous area gland which features a dual seal for steel wire armoured cables.**

### Features and benefits:

- Brass indoor and outdoor cable gland for use in hazardous areas
- Suitable for circular, galvanized steel wire armour cables with extruded polymeric bedding and oversheath
- Achieves IP66 seal onto cable and to enclosure with suitable sealing washer or thread sealant
- Three part armour lock provides mechanical cable retention and electrical continuity
- Inner PCP seal grips cable bedding and provides additional ingress protection
- Suitable for most climatic conditions - weatherproof and waterproof
- Standard and Nickel plated versions available
- Full Installation Instructions supplied

## Technical Information:

Certified II 2GD, Ex e II & Ex d IIC under ATEX directive 94/9/EC

Atex Compliance Standards: EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1

Certificate number Sira 02ATEX3092X

IECEX Compliance Standards: IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC

61241-0, IEC 61241-1

Certificate number IECEX SIR 10.0071X

Service temperature range -60°C to +90°C

### May be used in:


- Zones 0, 1 & 2 with Ex ia IIA, B & C equipment
- Zones 1&2 with Ex ib IIA, B & C equipment
- Zones 1&2 with Ex e II equipment
- Zones 2 with Ex nA II equipment
- Zone 21 & 22 with Ex tD A21

### Where the cable is effectively filled, may Also be used in:

- Zones 1 & 2 with Ex d IIC equipment not containing a source of ignition & with a volume less than 2000cm<sup>3</sup>
- Zones 1 & 2 with Ex d IIA & Ex d IIB equipment not containing a source of ignition & with any volume
- Zone 1 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with a volume less than 2000cm<sup>3</sup>
- Zone 2 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with any volume
- Zone 2 with Ex nR II equipment

## Specifications

Gland Kit Reference		Cable Dimensions mm						Gland Dimensions mm				
Design Reference		Size	Under Armour Ø (A)		Overall Ø (B)		Armour Wire ø	Entry Thread (D)	Thread Length (E)	Protrusion Length (F)	Hexagon	
Standard	Nickel Plated		Min	Max	Min	Max					A/F (G)	A/C (H)
472AA-51	472AA-51V	16	3.8	8.7	8.0	13.2	0.9	M16 × 1.5	15	41	23.4	26.7
472AA-71	472AA-71V	20SS	3.8	8.7	8.0	13.2	0.9	M20 × 1.5	15	41	23.4	26.7
472AA-52	472AA-52V	20S	8.0	11.8	8.0	15.8	0.9 / 1.25	M20 × 1.5	15	43	25.7	29.2
472AA-53	472AA-53V	20	11.8	14.2	12.5	20.8	0.9 / 1.25	M20 × 1.5	15	43	30.5	34.0
472AA-55	472AA-55V	25	14.0	20.1	17.0	27.2	1.25 / 1.6	M25 × 1.5	15	48	37.6	42.2
472AA-56	472AA-56V	32	19.7	26.6	23.5	33.5	1.6 / 2.0	M32 × 1.5	15	53	47.2	53.6
472AA-57	472AA-57V	40	26.6	32.4	29.0	39.9	1.6 / 2.0	M40 × 1.5	15	56	56.4	61.5
472AA-58	472AA-58V	50S	32.4	38.4	38.0	46.2	2.0 / 2.5	M50 × 1.5	15	61	60.0	66.0
472AA-59	472AA-59V	50	38.4	44.3	39.5	52.6	2.0 / 2.5	M50 × 1.5	15	61	70.1	77.2
472AA-60	472AA-60V	63S	44.3	50.3	50.0	58.9	2.5	M63 × 1.5	15	64	75.0	83.0
472AA-61	472AA-61V	63	50.3	56.2	51.3	65.3	2.5	M63 × 1.5	15	64	80.0	87.4
472AA-62	472AA-62V	75S	56.2	62.2	62.0	71.6	2.5	M75 × 1.5	15	73	90.2	99.1
472AA-63	472AA-63V	75	62.2	68.1	62.5	78.0	2.5	M75 × 1.5	15	73	98.8	109.2
472AA-64	472AA-64V	85	68.0	74.0	68.0	88.0	3.15	M80 × 2.0	20	102	115.1	126.0

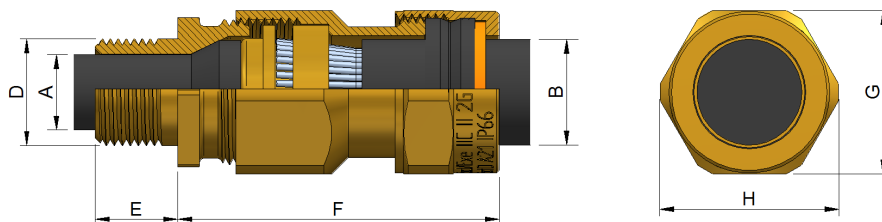

**Prysmian Cables & Systems Limited,**  
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

**Commercial Enquiries,**  
Sales Office Tel: 0845 767 8345,  
International Sales Office Tel: +44 2380 295481

[www.biconcomponents.co.uk](http://www.biconcomponents.co.uk)

**Prysmian  
Draka  
General Cable**