

# E2MC “Raintight” RA

## 416RA series



**The E2MC is an aluminum gland suitable for metal clad armored cables for industrial areas.**

### **Features and benefits:**


- Fast, easy installation
- Large sealing range
- Tested and approved to UL standards
- UL listed category PJOX

## Technical Information:

- 6082T6 aluminum construction
- For use in most climatic conditions, rated to IP66 for wet locations
- Full installation instructions supplied

## Specifications

Gland Reference		Cable Dimensions Accommodated				Gland Dimensions			Weight
Design Reference	Hub Size NPT (D)	Over Armor (A)		Overall Ø (B)		Hub Length (E)	Protrusion Length (F)	Diameter	lbs
		Min	Max	Min	Max				
416RA-02	½"	0.460"	0.500"	0.56"	0.62"	0.54"	2.4"	1.18"	0.15
416RA-03	¾"	0.485"	0.680"	0.51"	0.76"	0.63"	2.8"	1.34"	0.19
416RA-04	1"	0.650"	0.890"	0.67"	1.05"	0.75"	2.8"	1.69"	0.31
416RA-05	1 ¼"	0.865"	1.140"	0.95"	1.30"	0.79"	3.1"	1.97"	0.43
416RA-06	1 ½"	1.100"	1.350"	1.14"	1.44"	0.81"	3.2"	2.26"	0.58
416RA-07	2"	1.320"	1.540"	1.36"	1.65"	0.85"	3.5"	2.76"	0.86
416RA-08	2 ½"	1.510"	2.080"	1.55"	2.20"	1.26"	4.3"	3.33"	1.78
416RA-09	3"	2.070"	2.700"	2.11"	2.85"	1.32"	4.3"	3.98"	2.30
416RA-10	3 ½"	2.900"	3.350"	2.76"	3.52"	1.38"	4.4"	4.65"	2.81

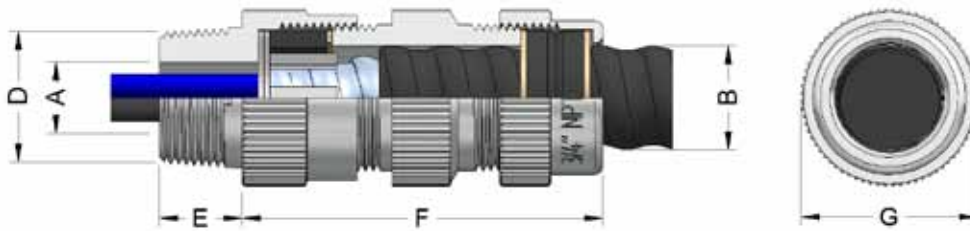

**Prysmian Cables & Systems Limited,**  
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

**Commercial Enquiries,**  
Sales Office Tel: 0845 767 8345,  
International Sales Office Tel: +44 2380 295481

[www.biconcomponents.co.uk](http://www.biconcomponents.co.uk)